



Parking Advertising Barrier Motor For Automatic Flap Barrier

Our Product Introduction

for more products please visit us on automaticbarriersgates.com

Basic Information

- Place of Origin: China
- Brand Name: CBG
- Model Number: 19A
- Minimum Order Quantity: 1
- Price: 300-320USD
- Delivery Time: 5-8days
- Payment Terms: L/C, T/T
- Supply Ability: 20,000 peices each month




Product Specification

- Warranty: 2 Years
- Voltage: DC24V
- Insulation Class: F
- Operation Lifetime: >=5 Million Times
- Output Power: 120W
- Feature: Durable
- Color: Optional
- Altitude: 1000M Or Lower
- Highlight: **Parking Advertising Barrier Motor,
Automatic Flap Barrier Gate Motor,
Automatic Flap Advertising Barrier Motor**



More Images

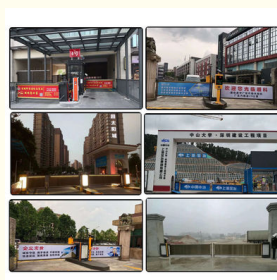

Product Description

Heavy Duty Barrier Gate Motor For Automatic Flap Barrier Gate Parking Advertising Barrier Gate

Introduction

The surface of the movement is treated with flash silver, and the chassis can be selected as standard or customized.

Meet the requirements of different tastes. Support external and built-in grounding detection, can be configured with a variety of anti-collision system, grounding sense, pressure wave, infrared and other anti-collision functions.

Company Profile

Shenzhen Chengbang Mechanical and Electrical Industry Co., Ltd. was established in 2010, located in Guangdong China. The factory with 50,000 square meter areas and more than 50 experienced employees which supply ability is 2000pcs per month. We are the professional manufacturer for vehicle entrance management system and equipment (Swinging door operating mechanism, Brush-less gate motor, DC brush-less single unit operating mechanism, Commercial gate operating mechanism and so on). We have strong scientific technology, first-class produced lines, advanced gear testing centers and high-precision advanced equipment, imported CNC gears which are ahead of our peers in terms of quality. In pursuit of high quality products, excellent reputation, continuous innovation and development and perfect after-care service, we d launched a series of diversified products.

Production Profile

DC Brush-Less Single Unit Operating Mechanism >>>



Product Parameters

Voltage: DC24V
Output Efficiency: 120W
Current: 6A
Insulation Class: F
Gate Operation Time: 0.3~10s
Operation Lifetime: ≥ 5 million times

Working Environment


Temperature Range: -35°C~+60°C [-31°F~+140°F]
Humidity: 90% or lower (so long as there is no accumulated dew)
Altitude: 1000M or lower

Applications

Generally suited for controlling commercial pathway gates (large openings in particular) and vertical lift gates.

Functions & Features

CBG

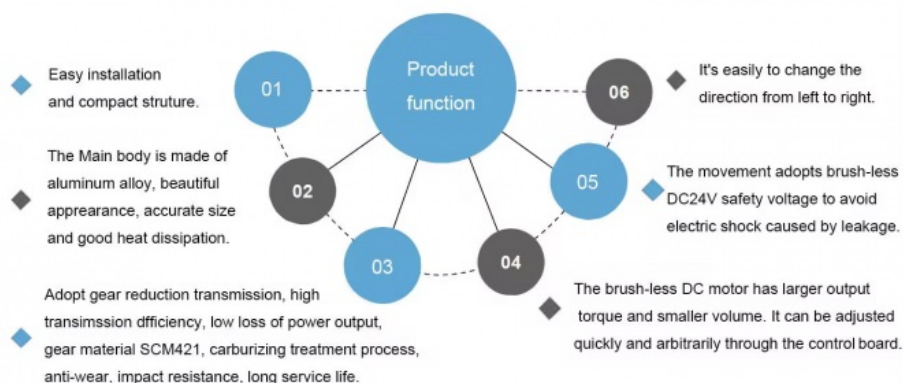



CBG[®] Shenzhen Chengbang Electromechanical Industry Limited

+8615017905059 mok_1szcb_cbg@163.com automaticbarriersgates.com

Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City