


## DC24V Voltage Advertising Barrier Gate 1.5A For Humidity Lower Than 85% Levels

Our Product Introduction

for more products please visit us on [automaticbarriersgates.com](http://automaticbarriersgates.com)

### Basic Information

- Place of Origin: Guangdong, China
- Brand Name: CBG
- Model Number: 18A-YB-3
- Minimum Order Quantity: 2 sets
- Price: \$490.00/sets 2-99 sets


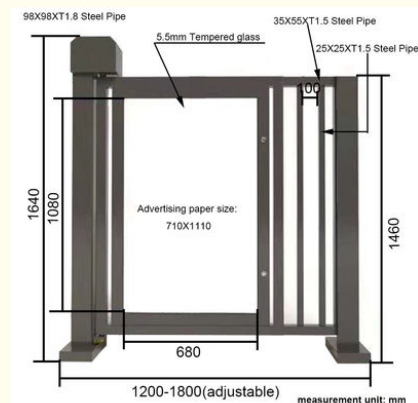


### Product Specification

- Special Features: Waterproof / Weatherproof, Other
- Customized Support: OEM, ODM, Customized Logo
- Type: Other
- Voltage: DC24V
- Output Efficiency: 30W
- Current: 1.5A
- Insulation Class: F
- Gate Operation Time: 3-6S
- Operation Lifetime: >=5million Times
- Temperature Range: -30°C To 70°C
- Humidity: 85% Or Lower
- Highlight: **DC24V Advertising Barrier Gate, 1.5A Advertising Barrier Gate, DC24V Boom Gate Advertising**



### More Images

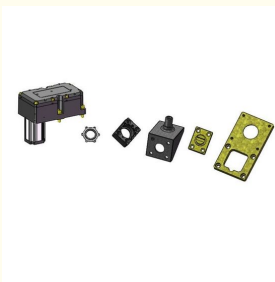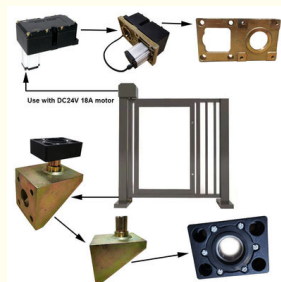

## Product Description

### DC24V Voltage High Speed Advertising Barrier Gate For Humidity Lower Than 85% Levels

#### Product Description

##### Advantages

1. Easy to use. The existing access control management personnel need simple training to work. The maintenance personnel of the community advertising door can find the fault through several simple steps and eliminate it quickly.
2. Highly integrated. The advertising door of the community has a strong comprehensive interface, which can be upgraded and expanded in the later construction. It is safe and durable, low failure rate and high cost.
3. High security. Through high-tech technologies such as infrared sensor, traffic logic judgment, motor torque feedback, current and mechanical structure, the anti pinch protection can be realized for the advertising door of the community.
4. Fast traffic speed. The response speed of the advertising door in the community is fast. Swipe the card and respond quickly in 0.1 seconds. It is forbidden to open the door, with an average of 30-40 people / minute, which is conducive to rapid passage.

**CBG®**



**CBG<sup>®</sup>**





98X98XT1.8 Steel Pipe

35X55XT1.5 Steel Pipe

5.5mm Tempered glass

25X25XT1.5 Steel Pipe

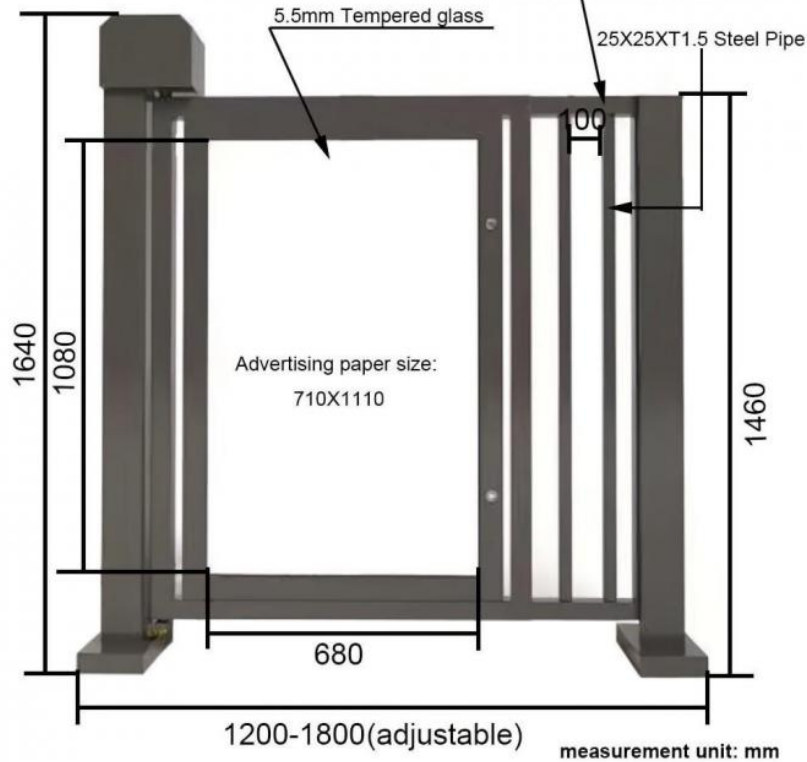

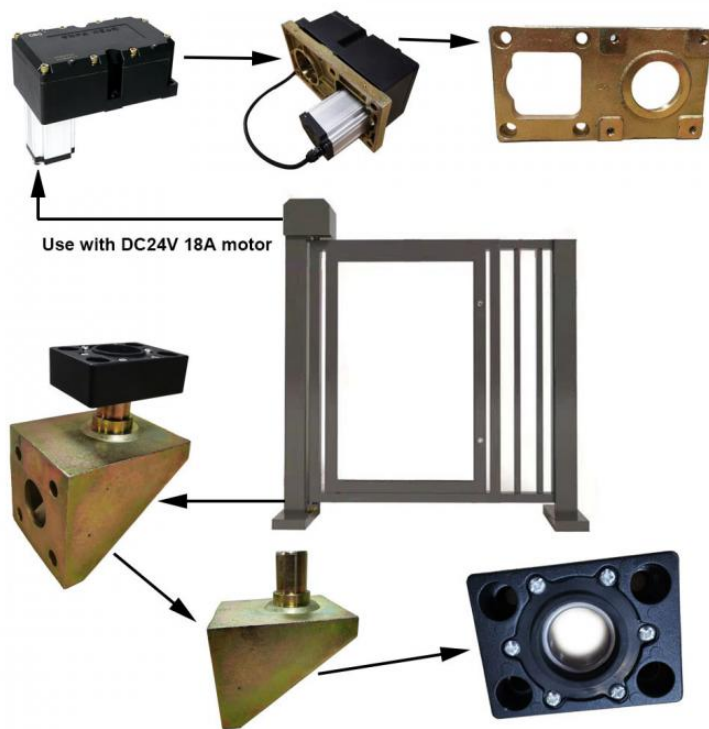


## Specification of 18A Motor

Voltage:DC24V	Insulation Class:F	Gate Operation Time:3-6S
Output Efficiency:30W	Altitude:1000M or lower	Operation Lifetime:>=5 million times
Current:1.5A	Humidity:85% or lower	Temperature Range:-30°C to +70°C
Application:mainly suited for controlling rapid-response gates such as swing gates or barrier lift gates(single or double jointed)		

## Details Images



Power supplier

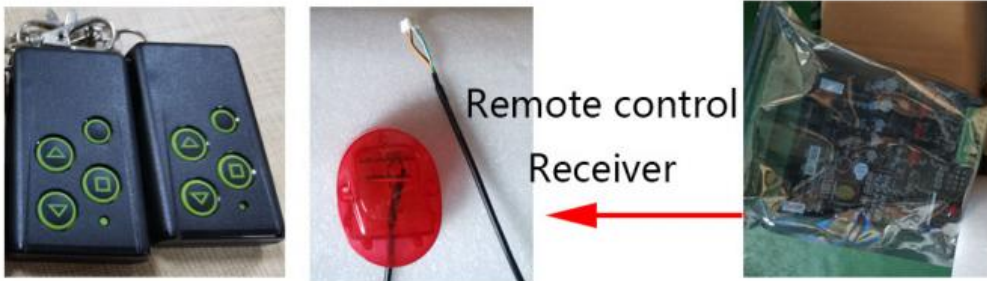

Remote control  
Receiver

Packing & Delivery





## Company Profile

---



Shenzhen Chengbang Electromechanical Industry Limited is a manufacturer specializing in the production of non-standard reducers and motors for road gates, gear reduction machines, aluminum shell motors and gate motors. We're the manufacturer of boom barrier mechanism in China more than 10 years. The current is more than 100 staffs and 3 factories. We can customize according to customer needs.

## Factory View

---





Visit Factory

---



Exhibition

---





**CBG<sup>®</sup>** Shenzhen Chengbang Electromechanical Industry Limited

+8615017905059    mok\_1szcb\_cbg@163.com    automaticbarriersgates.com

Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City