Pedestrian Entrance Advertising Control Barrier Gate DC24V 30W

Basic Information

- Place of Origin:
- Brand Name:
- Model Number:
- Price:
- Supply Ability:
- CBG, CBG 18A


Guangdong, China

- \$490.00/sets 1-99 sets
 - 2000 Piece/Pieces per Month



Product Specification

- Warrantage:
- Voltage:
- Inslation Class:
- Output Efficiency:
- Gate Operation Time:
- Operation Lifetime:
- Himidity:
- Altitude:
- Port:
- Highlight:
- 2 Years DC24V F 30W 3-6S >=5 Million Times 85% Or Lower
- 1000M Or Lower
- Shenzhen
 - Barrier Gate DC24V, Barrier Gate 30W, Pedestrian Entrance Barrier Gate



More Images



2 Year Warrantage Pedestrian Entrance Advertising Control Gate By Chengbang Security

Company Profile

Shenzhen Chengbang Mechanical and Electrical Industry Co., Ltd. was established in 2010, located in Guangdong China. The factory with 50,000 square meter areas and more than 50 experienced employees which supply ability is 2000pcs per month. We are the professional manufacturer for vehicle entrance management system and equipment (Swinging door operating mechanism, Brush-less gate motor, DC brush-less single unit operating mechanism, Commercial gate operating mechanism and so on). We have strong scientific technology, first-class produced lines, advanced gear testing centers and high-precision advanced equipment, imported CNC gears which are ahead of our peers in terms of quality. In pursuit of high quality products, excellent reputation, continuous innovation and development and perfect after-care service, we d launched a series of diversified products.




Our advantages:

1. NO MOQ limit.

2. 24 Hours delivery for stock

3. 2 Year warranties.


Products Description

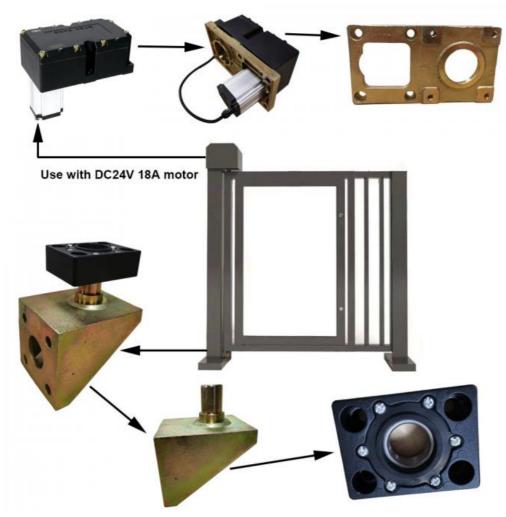

18A Motor Parameters

Voltage:DC24V	Output Efficiency:30W	Humidity:85% or lower
Insulation Class:F	Gate Operation Time:3-6S	Altitude:1000 Meter or lower
Current:1.5A	Operation Lifetime:>=5million times	Temperature Range:-30°C to +70°C

Applications: Residential areas, commercial centers, stations and so on

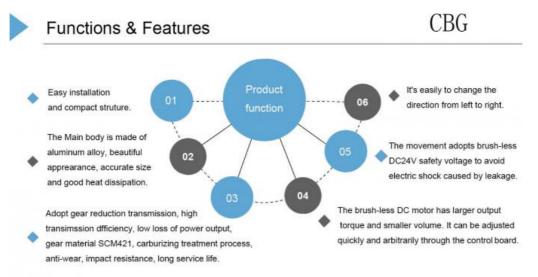



1. Cover with plastic and put the motor in the carton.

2.Seal the carton with tape

Single net weight about : 5KG

Single package carton size: 29.5X20.8X13.2CM Package Type: Carton or Wooden case

Old and New Product's Difference



Before:

1) Worm gear, general appearance

2) The previous products use with Rv50 reducer and added the splint to compose the movement. The worm gear is a consumable product. After using a long time, there will be a large gap, the pole will be not stable and shake so will cause the gear reducer to grind.

3)The products mainly used with AC 220V motor, the fixed speed was not adjustable.

4) Open structure, a low degree of protection, easy to enter water.

5) AC220V.

6) During installation, needs to adjusted the magnet position to ensure the door opening angle. After a long time, the shaking will affect the limit position or the pole may be deviated downwards.



After:

1) Gear transmission structure, beautiful appearance, compact structure, strong overall sense.

2) The new products are tailor-made for this industry and the gear adopts the processing technology of worm grinding wheel grinding after heat treatment, fine rolling of hard alloy hob, etc., the accuracy grade \geq GB / T100951, 2-2001 7 level.

3)The new product uses with DC brushless motor to avoid the problem of carbon brush life. Adjustable speed.

4)The entire seal structure, high degree of protection (\geq IP55); have a rainproof capability.

5) DC24V(Safe voltage)

6) Installed the chassis, adjust the position automatically after power on, and adjust the angle of rising pole and falling pole at will.

Factory View



Assembly equipment







Visit factory



Exhibition



Enterprise Qualification



Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City