
Entrance And Exit Automatic Barrier Gate Car Parking Turnstiles Waterproof

Basic Information

. Place of Origin: Guangdong, China

CBG . Brand Name: 18B-ZY3 Model Number: Minimum Order Quantity: 2 pieces

• Price: \$360.00/pieces 2-99 pieces



Product Specification

 Working Temperature: -30-60°C · Power Supply: 140W • Usage: Outdoor Boom Barrier Length: 1.5-6M DC-24V · Work Voltage: Waterproof Feature: 0.3-6s • Operating Speed: Insulation Level: · Operating Life: >5 Million

• Warranty: • Highlight: Exit Automatic Barrier Gate,

2 Years

Entrance Automatic Barrier Gate, Car Parking Turnstile Barrier Gate



More Images







Product Description

Waterproof Customized Speed Car Parking Turnstiles Elegant Entrance And Exit Barrier Gate

Product Description

Overview

Company Profile

Product description



Big torque motor **Collision resistant motor**

Toll station motor

MCBF more 5 million times

Fast response



Technical Parameters

Size 330*270*1020mm

Power supply DC 24V

Open/close speed 0.3s to 6s

Working temperature -30~60°C

Rated power 140w

Motor rated speed 1500r/min

Humidity <=85%

Remote control

distance

30 m


Max boom length 6m


Features


- 1)The movement adopts side stick installation, which is convenient for installation and compact in structure.
- 2) When power off, we can lift up the boom arm by hand directly
- 3)The main body of the movement is made of aluminum alloy, which is made by die-casting process, with reliable mechanical strength and beautiful appearance view, accurate size, good heat dissipation.
- 4)The core adopts gear reducer, which has high transmission efficiency and small power output loss; gear material quality scm421,carburizing heat treatment process, precision grinding, wear resistance, impact resistance, service life far beyond worm gear transmission structure.
- 5)The core adopts DC brushless motor, with large output torque and small volume, which can be realized by controller the speed can be adjusted at will. When the lowering and lifting poles are in place, the deceleration buffer can be realized to make the brake poles in place stably.
- 6)DC24V safety voltage is adopted for the motor to avoid electric shock accident caused by electric leakage and personal injury safety is more guaranteed.





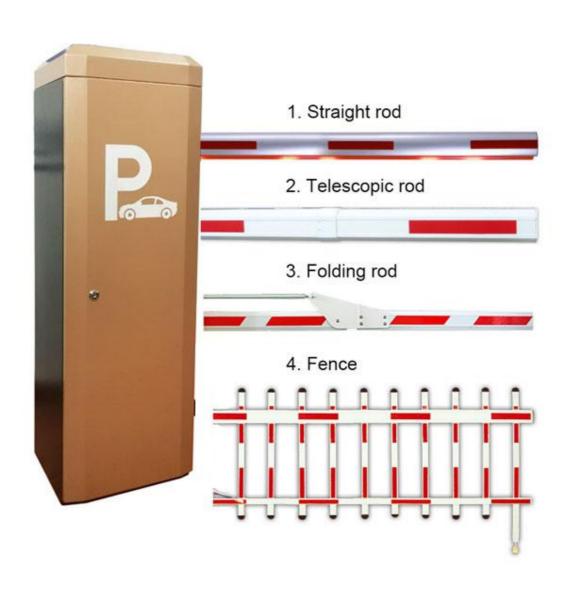


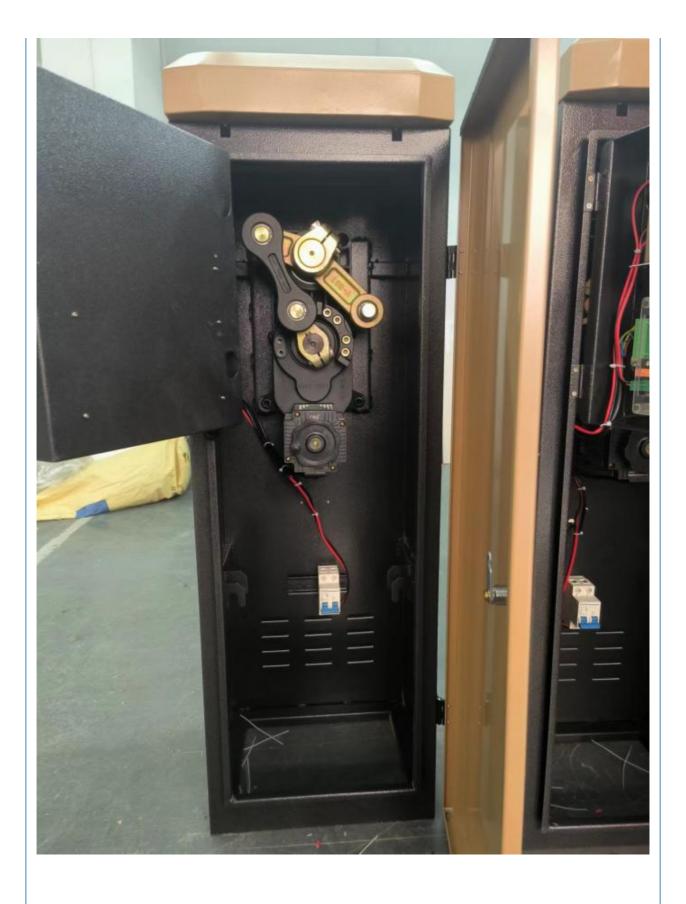

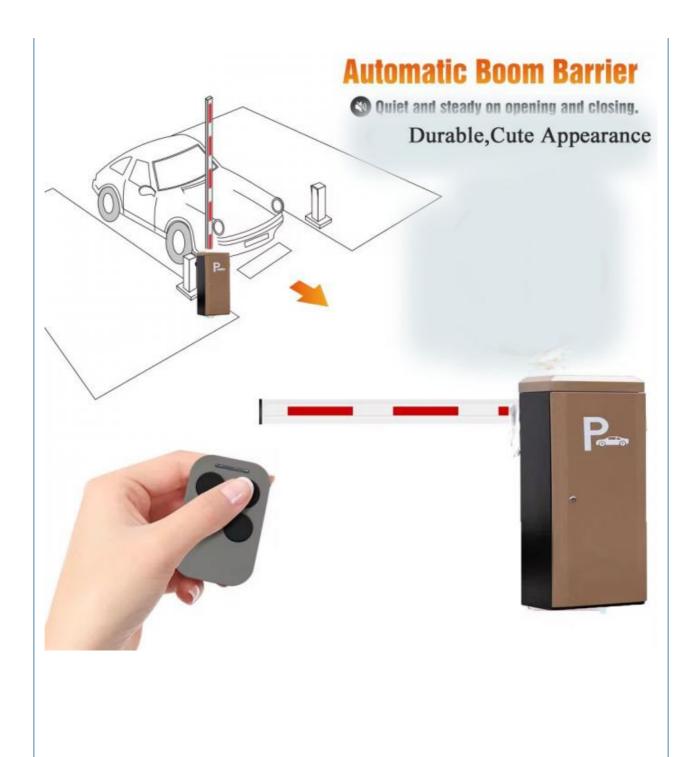



Easy Operation, Quiet, Steady

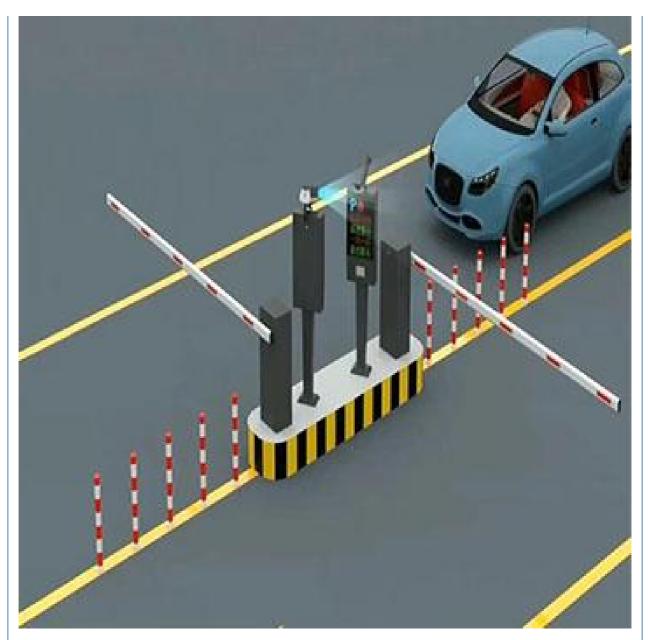

Packing & Delivery

The packaging of 18B unit motor



1.Put polyurethane foam inside



2.Cover with plastic and put the motor into the carton



3.Seal the carton with tape



To better ensure the safety of your goods, professional, environmentally friendly, convenient and efficient packaging services will be provided. company information







Office and factory





Products



Certification





















CBG® Shenzhen Chengbang Electromechancal Industry Limited

+8615017905059

Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City