Heavy Duty Automatic Boom Barrier Gate For Office Building Access 1.5-6M Length

Basic Information

Place of Origin: Guangdong, China

Brand Name: CBG
Model Number: 18B-ZY3
Minimum Order Quantity: 2 pieces

Price: \$360.00/pieces 2-99 pieces



Product Specification

• Working Temperature: -30-60°C · Power Supply: 140W • Usage: Outdoor Boom Barrier Length: 1.5-6M DC-24V · Work Voltage: Waterproof Feature: 0.3-6s · Operating Speed: Insulation Level: · Operating Life: >5 Million • Warranty: 2 Years

• Highlight: Office Boom Barrier Gate,

Building Access Boom Barrier Gate, 6M Length Boom Barrier Gate



More Images









Product Description

Heavy Duty Automatic Boom Barrier Gate For Office Building Access 1.5-6M Length -30-60C

Product Description

Overview

Company Profile

Heavy Duty Automatic Boom Barrier Gate For Office Building Access Gate Barriers

Product description

A boom barrier is designed for a range of max opening up to 6m. It is ideal solution for controlling vehicle traffic in parking lots, private entrances, industrial and public uses.

As a manufacturer, we have more than 10 year experiences on designing, producing and installing boom barriers. We have good quality control, so we vigorously test our boom barriers to make sure a longer life span.

Application:

Office Buildings.

Shopping and mall Centers.

Vehicle Parks.

Distribution and Warehouse Facilities.

Commercial and Industrial Facilities.

Government Buildings.

Stations

Features

- 1)The movement adopts side stick installation, which is convenient for installation and compact in structure.
- 2) When power off, we can lift up the boom arm by hand directly
- 3)The main body of the movement is made of aluminum alloy, which is made by die-casting process, with reliable mechanical strength and beautiful appearance view, accurate size, good heat dissipation.
- 4)The core adopts gear reducer, which has high transmission efficiency and small power output loss; gear material quality scm421,carburizing heat treatment process, precision grinding, wear resistance, impact resistance, service life far beyond worm gear transmission structure.
- 5)The core adopts DC brushless motor, with large output torque and small volume, which can be realized by controller the speed can be adjusted at will. When the lowering and lifting poles are in place, the deceleration buffer can be realized to make the brake poles in place stably.
- 6)DC24V safety voltage is adopted for the motor to avoid electric shock accident caused by electric leakage and personal injury safety is more guaranteed.

Parameters



Technical Parameters

Size 250*300*980mm

Power supply DC 24V

Open/close speed 0.3s to 6s

Working temperature -30~60°C

Rated power 140w

Motor rated speed 1500r/min

Humidity <=85%

Remote control distance

30 m

Max boom length


6m


External power 220V 50/60HZ


Product picture





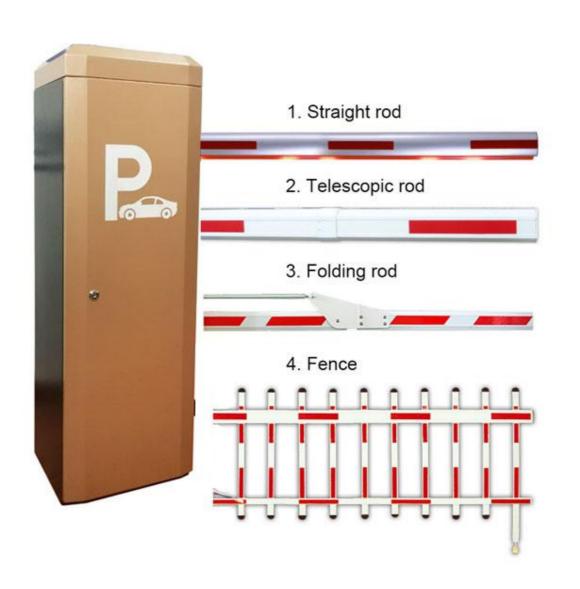


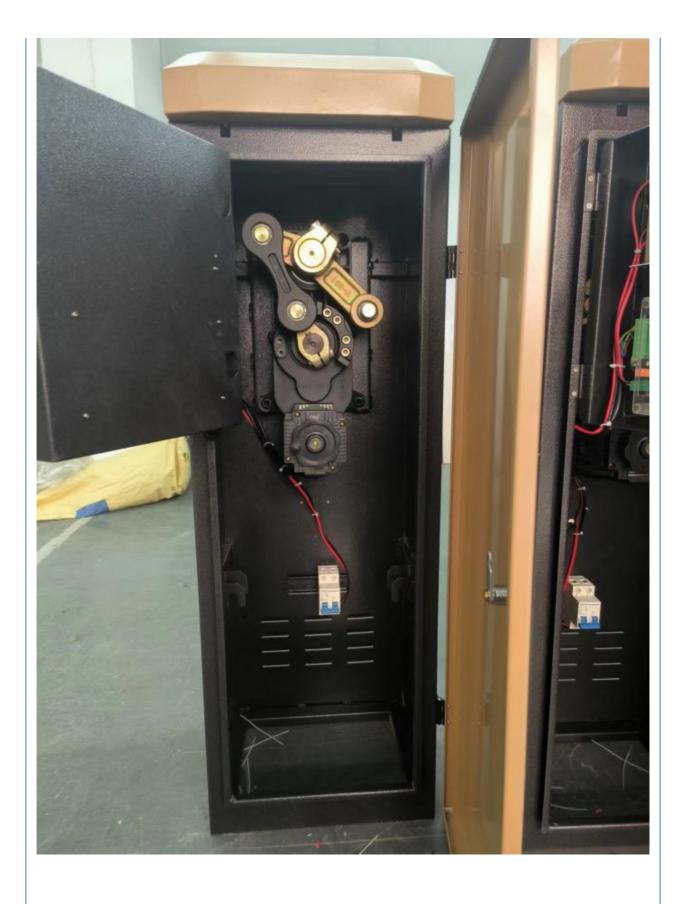

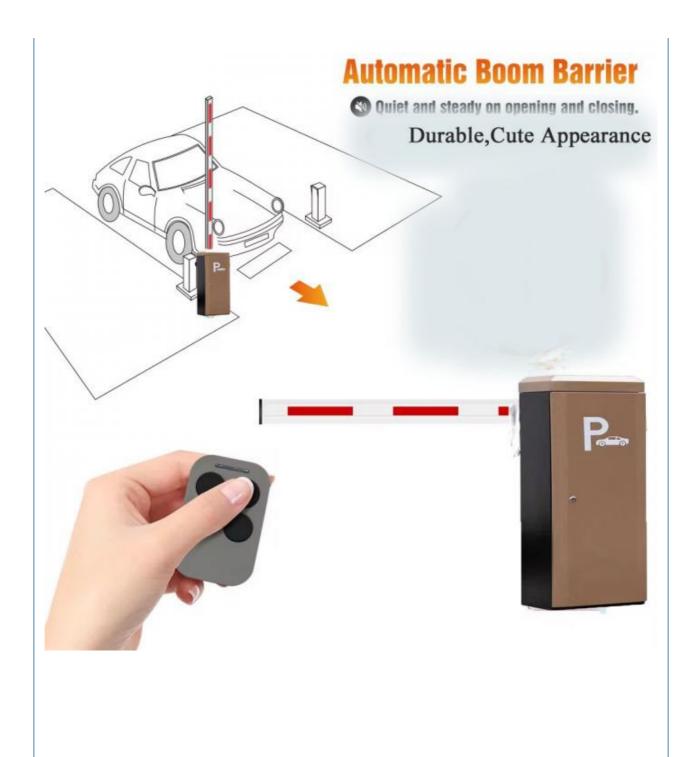



Easy Operation, Quiet, Steady

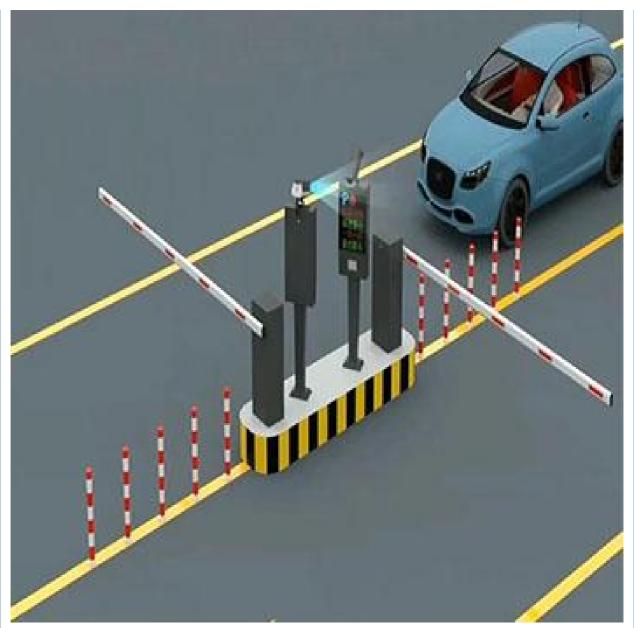

interior structure:



Big torque motor Collision resistant motor

Toll station motor

MCBF more 5 million times

Fast response

Packing & Delivery

The packaging of 18B unit motor



1.Put polyurethane foam inside



Cover with plastic and put the motor into the carton



3.Seal the carton with tape



To better ensure the safety of your goods, professional, environmentally friendly, convenient and efficient packaging services will be provided.

Boom barrier projects





Certification



















Exhibition



CBG[®] Shenzhen Chengbang Electromechancal Industry Limited

+8615017905059

mok_1szcb_cbg@163.com

automaticbarriersgates.com

Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City