




Max 6M Boom Length Parking Access Control Barrier Gate Constructed with 2.0mm Cold Rolled Steel Sheet Housing Material

Our Product Introduction

for more products please visit us on automaticbarriersgates.com


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: CBG
- Model Number: 21B
- Minimum Order Quantity: 1pieces

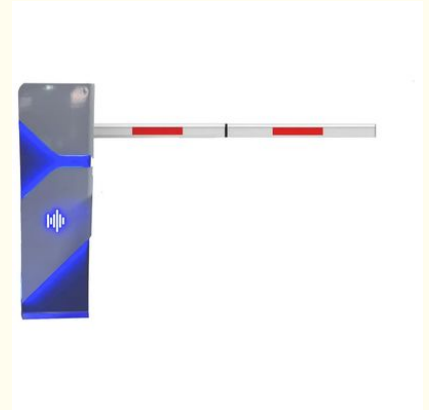

Product Specification

- Power Consumption: 120w
- Service: OEM/ODM Available
- Color: Blue,Yellow,gray,red,brown
- Housing Material: 2.0 Mm Cold Rolled Steel Sheet
- Boom Length: Max 6M (customized)
- Usage: Road Traffic Safety
- Product Name: Boom Barrier, Intelligent 100% Duty Cycle Automatic Boom Barrier Gate, Barrier Gate, Parking Boom Gate Automatic Arm Barrier, Guangzhou Road Barrier Automatic Boom Barriers Gate Price
- Motor Material: Aluminum Alloy
- Highlight: **Parking Access Control Barrier Gate, 6M Boom Access Control Barrier Gate**

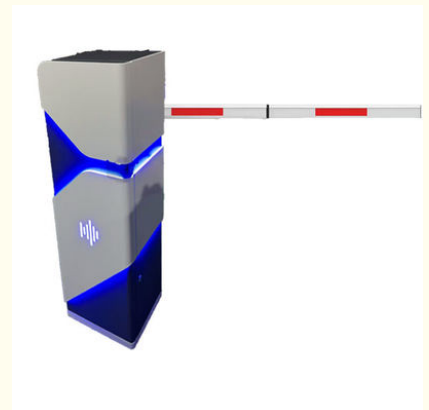

Product Description

120W Power Supply Road Safety Barrier Parking Boom Barrier Gate For Entrance And Exit

Product Description

Overview


That kind of parking system barrier is our new designed boom barrier ,we have shared it in Dubai Intersec exhibition ,also most of customers like it .Standard barrier gate; Up to 6m arm length; Arm Speed is 0.8S,1.5s, 3s(suggest use 3s); Outdoor and indoor.

It is a digital barrier gate which is suitable for modern management characterized by "safety, quickness, high efficiency and high quality". It is mainly used in parking lot, hotel, school, garden villa, enterprise and public institution, etc...

Product description

- 1.-The traffic barrier is widely used for the facilities of parking, traffic or toll system.
- 2.-Arms can be chosen from 1 meters to 6 meters.
- 3.-This type of barrier could match with direct boom(pole), fold boom Or fence boom..
- 4.-When power off, we can lift up the boom arm by hand directly
- 5.-All the process is soft without any noise and shaking.
- 6.-Housing color: yellow,red ,blue,black,white (optional)
- 8.-Boom arm direction can be chosen leftward to rightward.
- 8.-Auto warming up,suitable for cold environment.

Parameters

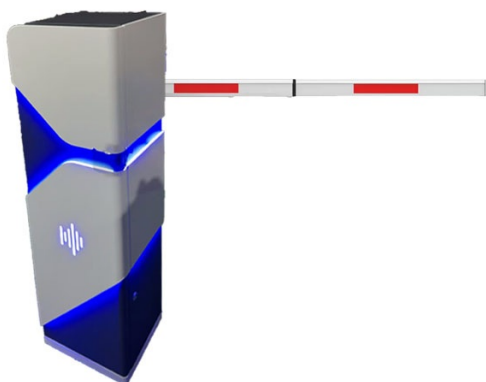

Parameters

| Power supply | DC24V |
|-------------------------|--------------------------|
| Control Board | DC brushless controller |
| Input power | 220V,56/60hz |
| Power | 120W |
| Lifting/ down way | Remote control or manual |
| Remote control distance | >30m |
| Types of arm | fold ,straight ,fence |
| Arm length | max 6m straight boom |
| Motor rated speed | 1500r/min |
| Working temperature | -30~+60 |
| Protect level | IP55 |
| Humidity | 85% |

interior structure:



Big torque motor

Collision resistant motor

Toll station motor

MCBF more 5 million times

Fast response

Packing & Delivery

The packaging of 18B unit motor



1.Put polyurethane foam inside



2.Cover with plastic and put the motor into the carton



3.Seal the carton with tape



To better ensure the safety of your goods, professional, environmentally friendly, convenient and efficient packaging services will be provided.

Boom barrier projects



Exhibition



Certification



CBG[®] Shenzhen Chengbang Electromechanical Industry Limited

+8615017905059 mok_1szeb_cbg@163.com automaticbarriersgates.com

Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City