



140W Community Remote Control Barrier Gate For Highway Toll Expressway

Our Product Introduction

for more products please visit us on automaticbarriersgates.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: CBG
- Model Number: 18B-ZY
- Minimum Order Quantity: 2 pieces
- Price: \$360.00/pieces 2-99 pieces



Product Specification

- Working Temperature: -30-60°C
- Power Supply: 140W
- Usage: Outdoor
- Boom Barrier Length: 1.5-6M
- Work Voltage: DC-24V
- Feature: Waterproof
- Operating Speed: 0.6S/1.2S/2.5S/4S
- Operating Life: >5 Million
- Warranty: 1 Year
- Highlight: **Community Remote Control Barrier Gate, 140W Remote Control Barrier Gate, Expressway Remote Control Barrier Gate**

Packaging and accessories



Product Description

140W Power Supply Remote Control Community Barrier Gate For Highway Toll Expressway

Product Description

Overview

Company Profile


Product description

The CBG boom barriers adopt the latest automatic technology and intelligent design ahead in this field. This barrier gate is suitable for indoor as well as outdoor parking area, Parking lots, toll gate, goods yard, railway crossing, commercial premises, apartment block access shopping malls, hospitals, stadiums, business centers, etc.

Features

- 1) The movement adopts side stick installation, which is convenient for installation and compact in structure.
- 2) When power off, we can lift up the boom arm by hand directly
- 3) The main body of the movement is made of aluminum alloy, which is made by die-casting process, with reliable mechanical strength and beautiful appearance view, accurate size, good heat dissipation.
- 4) The core adopts gear reducer, which has high transmission efficiency and small power output loss; gear material quality scm421, carburizing heat treatment process, precision grinding, wear resistance, impact resistance, service life far beyond worm gear transmission structure.
- 5) The core adopts DC brushless motor, with large output torque and small volume, which can be realized by controller the speed can be adjusted at will. When the lowering and lifting poles are in place, the deceleration buffer can be realized to make the brake poles in place stably.
- 6) DC24V safety voltage is adopted for the motor to avoid electric shock accident caused by electric leakage and personal injury safety is more guaranteed.


Parameters

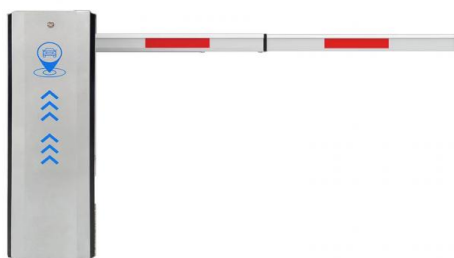

Technical Parameters

Size	250*300*990mm
Power supply	DC 24V
Open/close speed	0.3s to 6s
Working temperature	-30~60°C
Rated power	140w
Motor rated speed	1500r/min
Humidity	<=85%
Remote control distance	30 m
Max boom length	6m
External power	220V 50/60HZ

Product picture

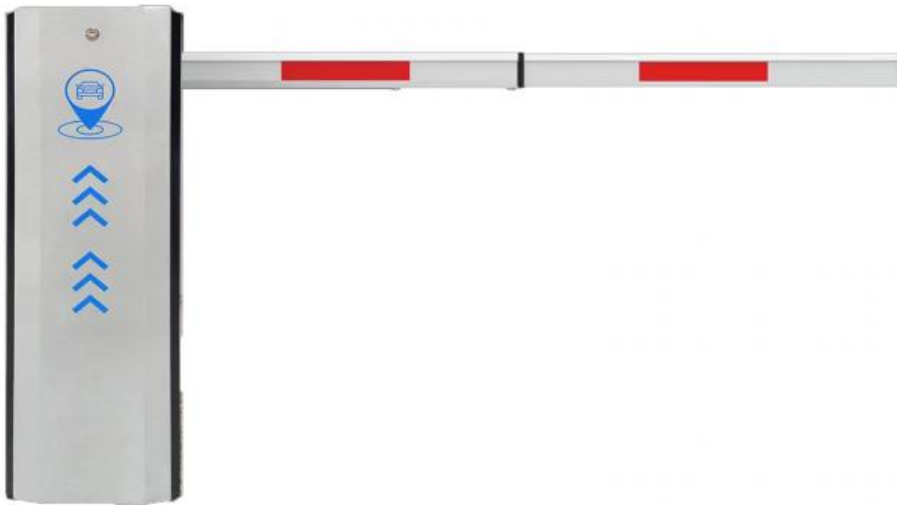



1. Straight rod




2. Telescopic rod




3. Folding rod



4. Fence

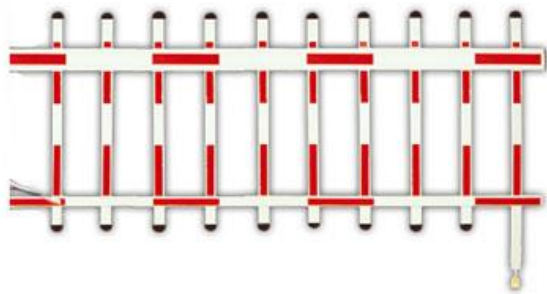

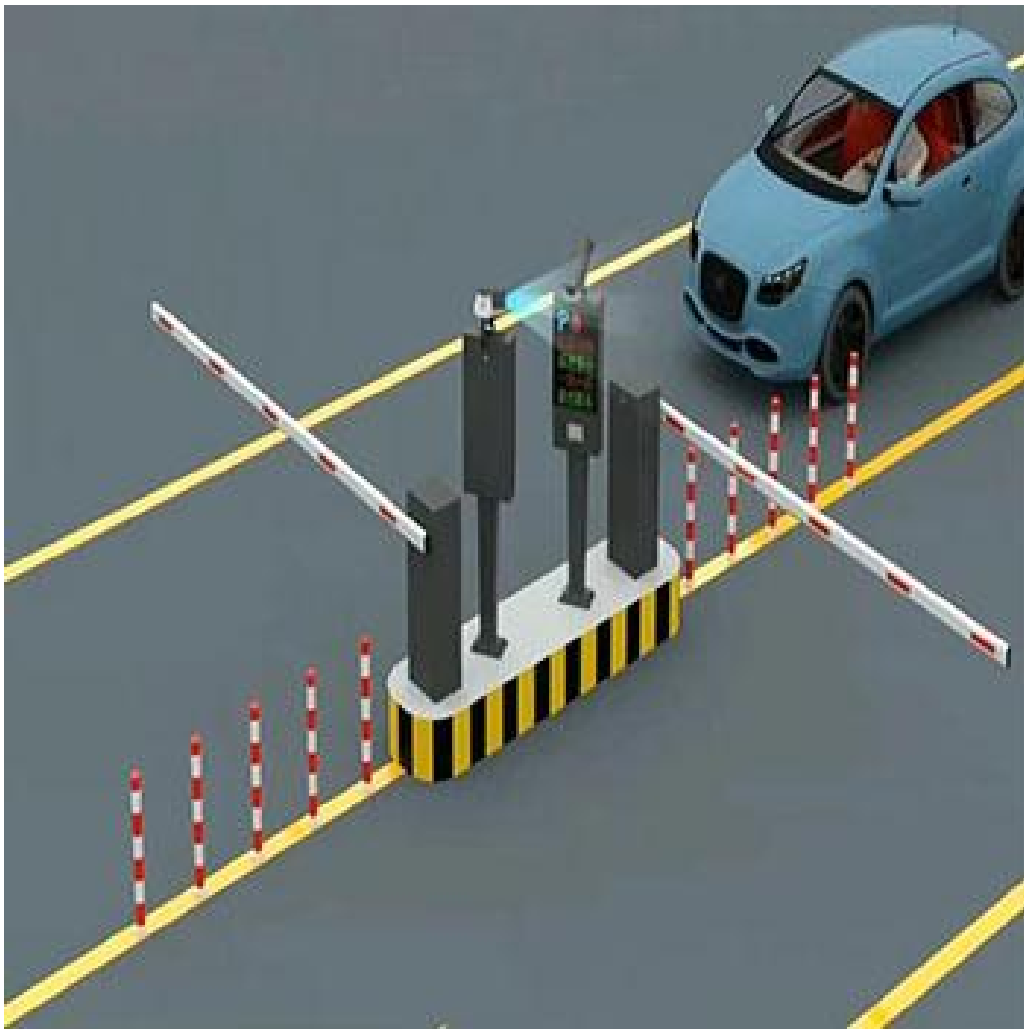

interior structure:



Big torque motor
Collision resistant motor

Toll station motor

**MCBF more 5 million
times**

Fast response

Packing & Delivery

The packaging of 18B unit motor




1.Put polyurethane foam inside



2.Cover with plastic and put the motor into the carton



3.Seal the carton with tape

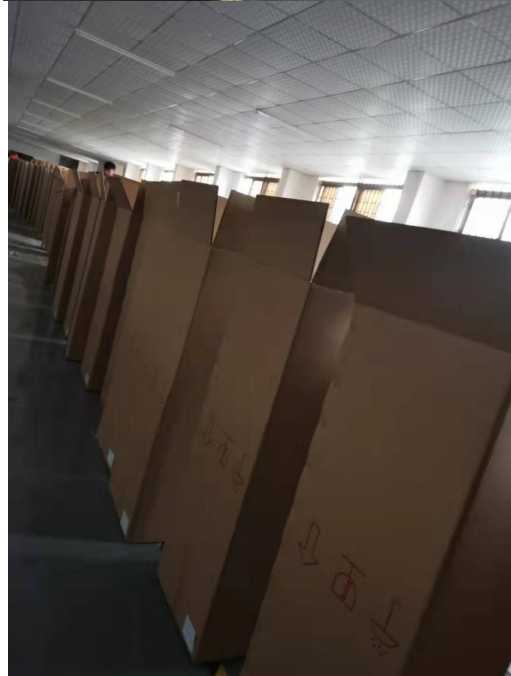

To better ensure the safety of your goods, professional, environmentally friendly, convenient and efficient packaging services will be provided.

Boom barrier projects



Exhibition



Certification



CBG[®] Shenzhen Chengbang Electromechanical Industry Limited

+8615017905059 mok_1s2cb_cbg@163.com automaticbarriersgates.com

Qiantou Xinxing Industrial Zone, Niushan community, Dongcheng District, Dongguan City